




MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY				STARTING		max. OUTPUT POWER W	POLES	CAPACITOR	BRUSHES
	Operating Range	Nominal	Speed	Current	Speed	Current	Torque	Output Power	Current	Torque				
	VDC	VDC	rpm	A	rpm	A	mNm	W	A	mNm				
FF-M30VA-2030	1,0-2,4	1,5	18.232	0,14	14.799	0,54	0,34	0,53	2,30	1,83	0,87	3	none	metal

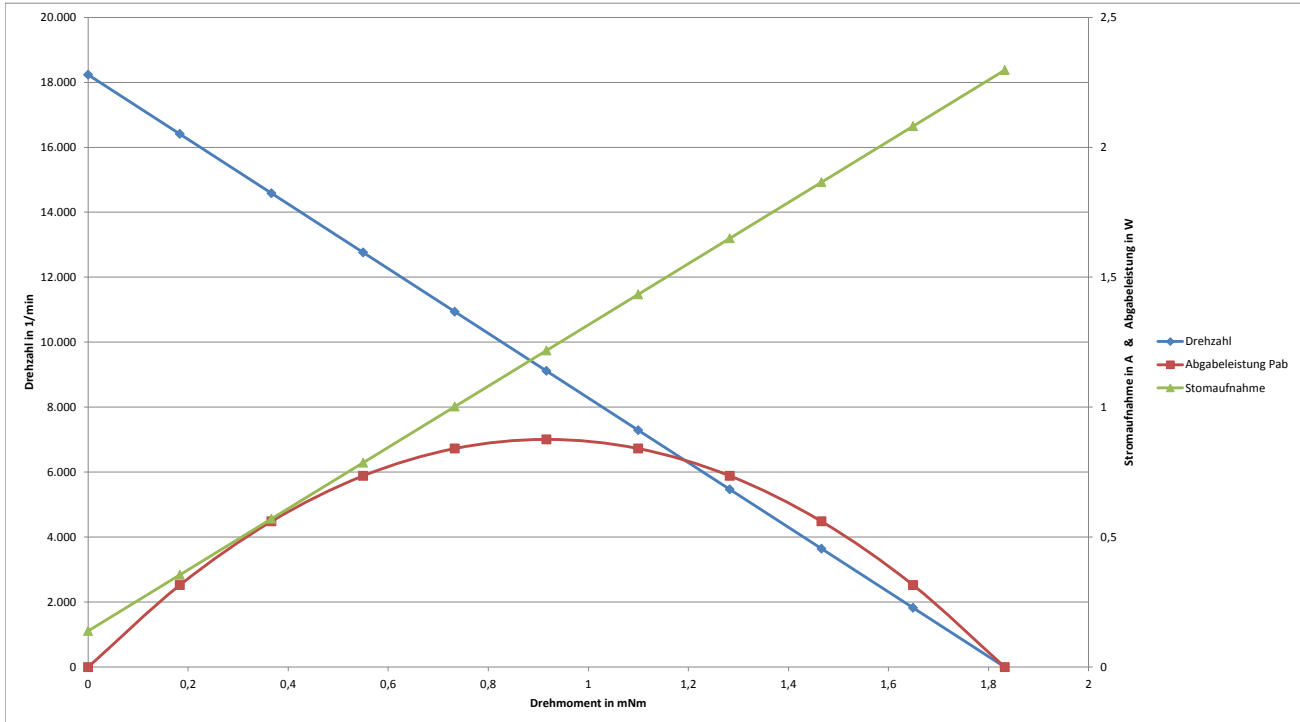

DIRECTION OF ROTATION



ISO M1. 4X0.3 TAPPED HOLE
2 PLACES
Usable machine screw length 1.0 max.
form motor mounting surface.

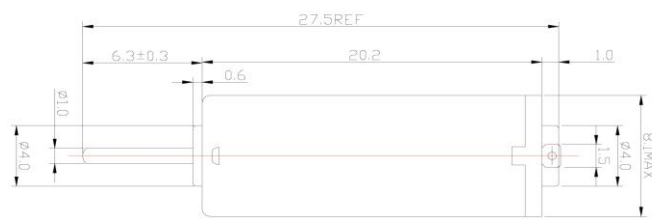

SHAFT LENGTH 26.8

UNIT: MILLIMETERS

