


With hall sensor	ECD3270S-...	1207	2407						
------------------	--------------	------	------	--	--	--	--	--	--

Motor data									
1	Nominal voltage	V	12	24					
2	No load speed	rpm	7200	7100					
3	No load current	mA	194	110					
4	Nominal speed	rpm	6623	6243					
5	Nominal torque	mNm	25	40					
6	Nominal current	A	1,78	1,36					
7	Stall torque	mNm	312	331					
8	Stall current	A	20	10,5					
9	Max. efficiency	%	81,3	80,6					

10	Supply voltage +Vcc	V	10..28	10..28					
11	Direction of rotation		CW	CW					
12	Torque constant	mNm/A	15,8	31,9					
13	Speed constant	rpm/V	606	299					
14	Speed/torque gradient	rpm/mNm	23,1	21,4					
15	Mechanical time constant	ms	3,7	3,5					
16	Rotor inertia	gcm ²	15,5	15,5					

17	Thermal resistance housing-ambient	5 K/W
18	Thermal resistance winding-housing	4 K/W
19	Thermal time constant winding	52 s
20	Thermal time constant motor	540 s
21	Ambient temperature	-40...+100°C
22	Max. permissible winding temperature	+150°C
23	Max. permissible speed	25000 rpm
24	Axial play at axial load	<8 N 0 mm >8 N max. 0.3 mm
25	Radial play	preloaded
26	Max. axial load (dynamic)	7.5 N
27	Max. force for press fits (static)	100 N
	(static, shaft supported)	2700 N
28	Max. radial loading, 5mm from flange	25 N
29	Number of pole pairs	1
30	Number of phases	3
31	Weight of motor	255 g

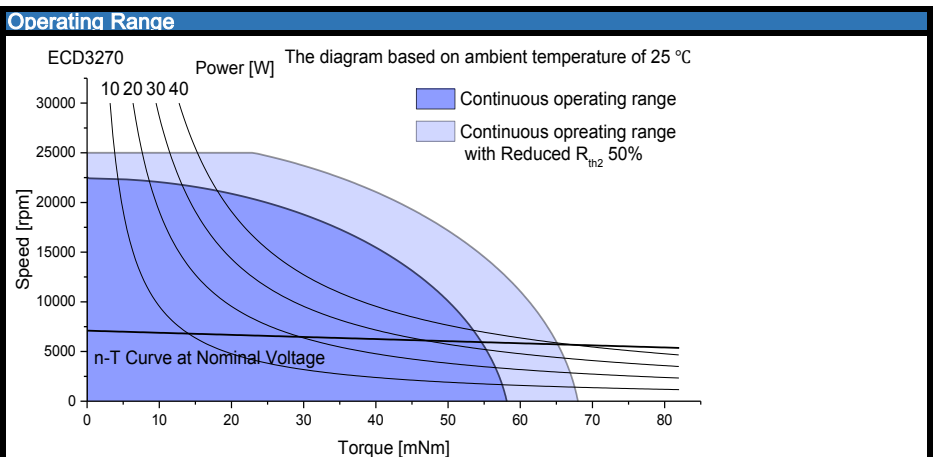

Controller features	
Sensor, Open loop, I _{max} < 2.2A	
Overload protection, Stall protection	
Max. temperature of electronics	+105°C

Configuration	
Function:	On&Off/Direction/Speed control/Brake
Speed control:	Speed closed&open-loop Control/Speed feedback
Performance:	Customized in the continuous operating range
Ball bearing:	Preload
Flange:	Standard frange front&back/customize the frange
Shaft:	Length/Diameter/Cut face
Leadwire:	PVC/Silicon/Teflon/UL No/Dimension/length
Connector:	JST/MOLEX/TE

Connection	
Connection	PTFE
Pin 1 +VCC	AWG20 red
Pin 2 GND	AWG20 black

More :
Please contact our sales engineers

Caution:
Incorrect lead connection will damage the controller!