





CD060Q- Series

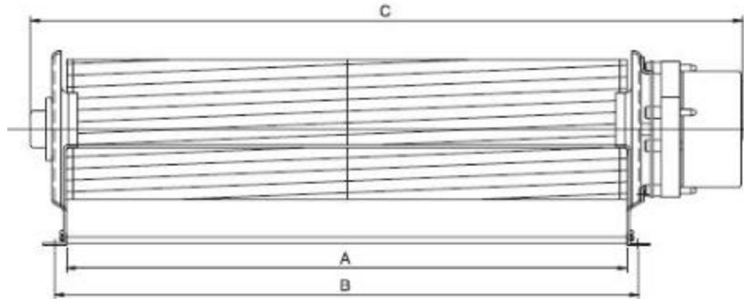


Size	Ø60mm
Housing	Aluminum
Impeller	Aluminum
Motor	DC Brushless Motor
Operating Temp.	0°C ~ +45°C
Insulation	Class A

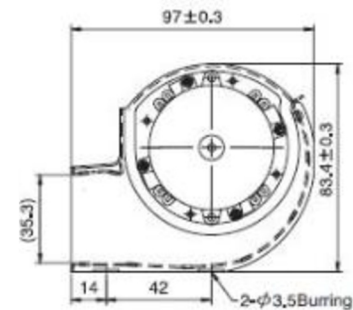

Model Number	Size (mm)			Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise (dB(A))	Weight (g)
	A	B	C								
CD06012V12BHWQ	120	130	185	12	0.65	7.8	2500	71	6.3	49	520
CD06012V24BHWQ				24	0.40	9.6					
CD06018V12BHWQ	180	190	245	12	0.95	11.4	2200	99	5.9	50	610
CD06018V24BHWQ				24	0.50	12					
CD06024V12BHWQ	240	250	305	12	0.50	6	1600	102	2.8	42	690
CD06024V24BHWQ				24	0.25	5.76					
CD06030V12BHWQ	300	310	365	12	0.60	7.2	1500	124	2.6	43	780
CD06030V24BHWQ				24	0.30	7.2					
CD06036V12BHWQ	360	370	425	12	0.65	7.8	1400	148	2.5	42	860
CD06036V24BHWQ				24	0.35	8.4					

_ for B / S = Ball Bearing / Sleeve Bearing

CD06012/CD06018



CD06024/CD06030/CD06036

