





CD060E- Series

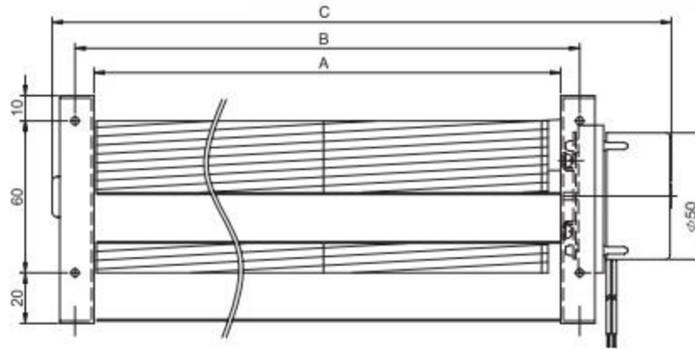

Size	Ø60mm
Housing	Aluminum
Impeller	Aluminum
Motor	DC 3-Phase-Motor
Operating Temp.	0°C ~+45°C
Insulation	Class A

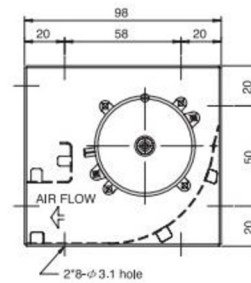

Model Number	Size (mm)				Voltage (V)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmH2O)	Noise dB(A)	Weight (g)
	A	B	C	D								
CD06012V24B3HWE	124	139	168	38	24	0.35	8.4	2500	67	4.4	44	500
CD06018V24B3HWE	184	199	228	38	24	0.40	9.6	2200	88	3.2	42	580
CD06024V24B3HWE	245	260	305	56	24	0.42	10.1	2100	117	3.6	41	850
CD06030V24B3HWE	306	320	365	56	24	0.46	11.0	2000	145	3.5	41	930
CD06036V24B3HWE	365	380	425	56	24	0.51	12.2	1950	166	3.4	40	1000
CD06042V24B3HWE	425	440	485	56	24	0.53	12.7	1900	187	3.3	40	1080
CD06060V24B3HWG	610	625	370	56	24	0.63	15.1	1650	244	2.5	39	1250
CD06036X2V24B3HWG	750	765	810	56	24	0.69	16.6	1700	272	2.6	40	1420
CD06042X2V24B3HWG	870	885	930	56	24	0.78	18.7	1600	293	2.5	41	1550